

FIG. 1

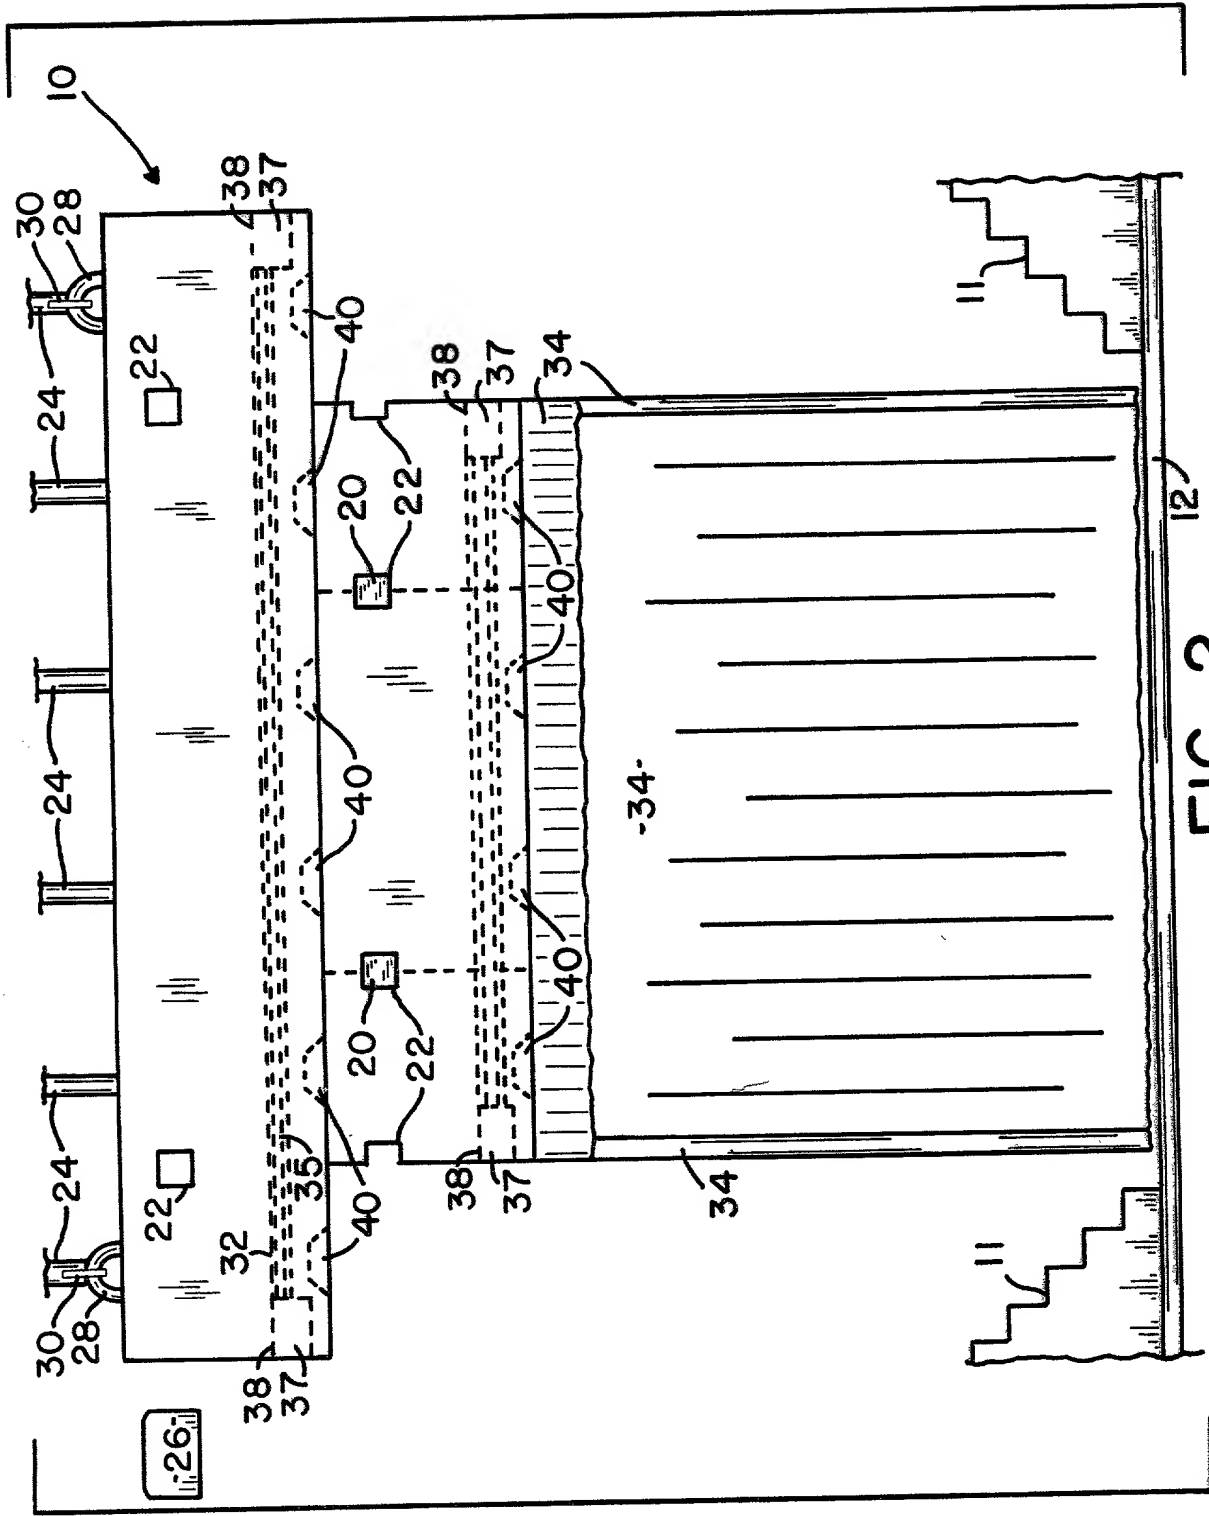


FIG. 2

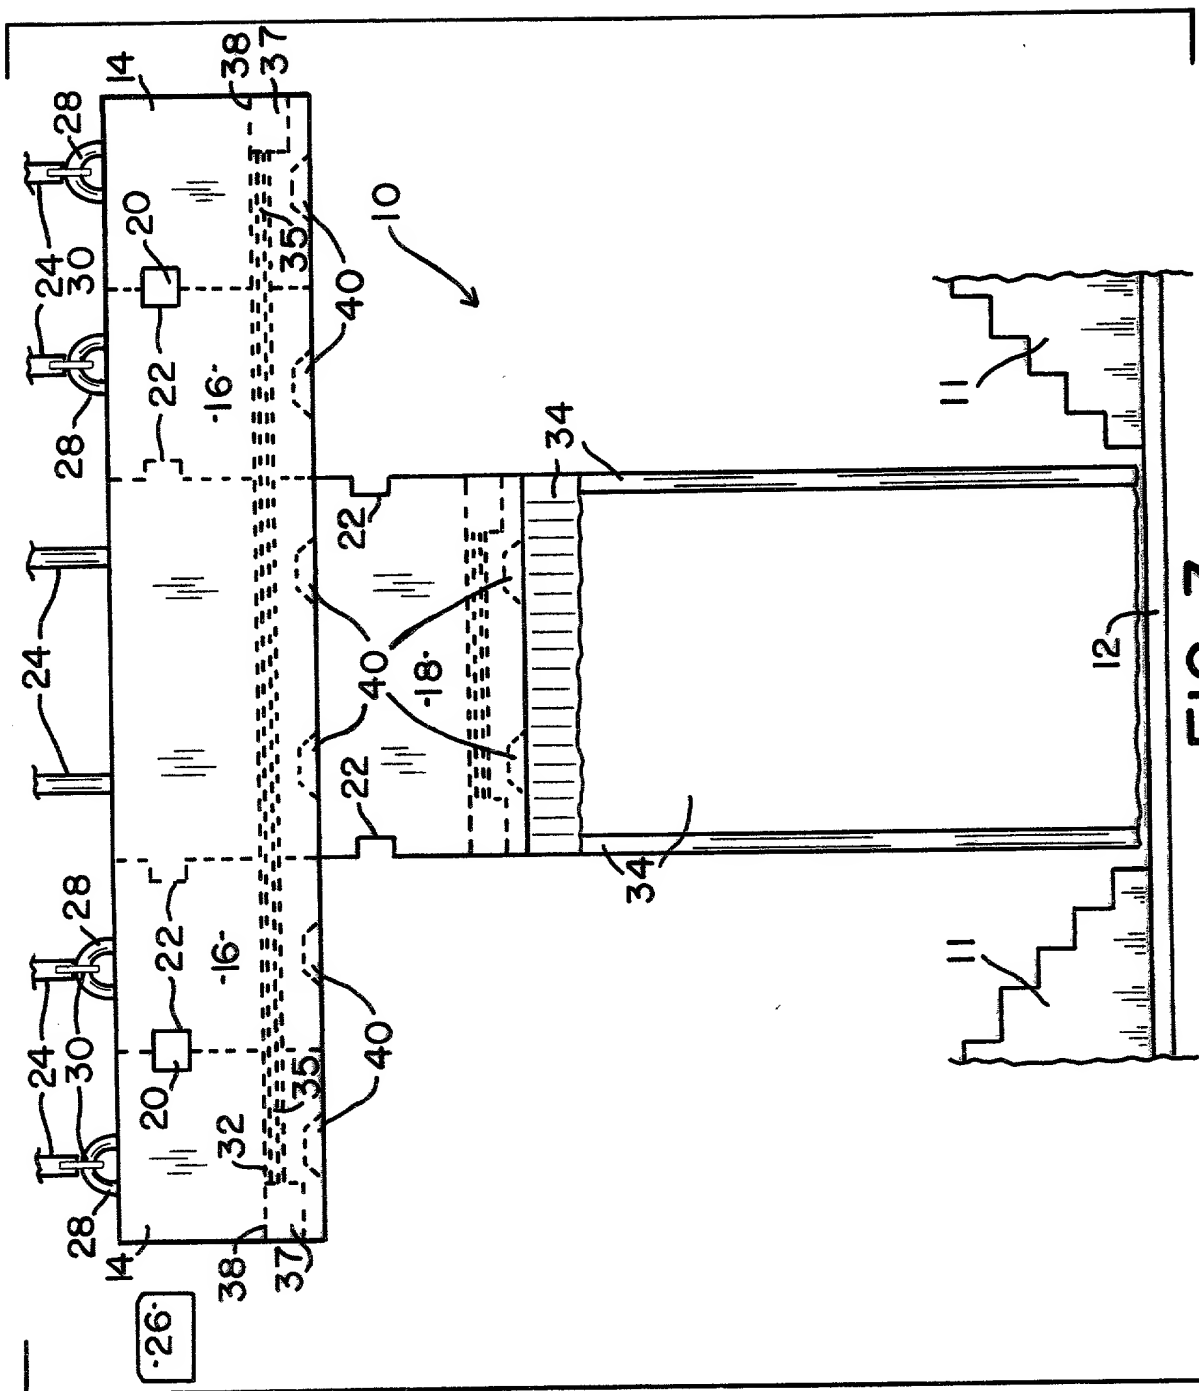


FIG. 3

FIG. 4 is a top view of the device 10 showing the arrangement of the elements 14, 16, 18, 35, 36, 37, 40, and 42.

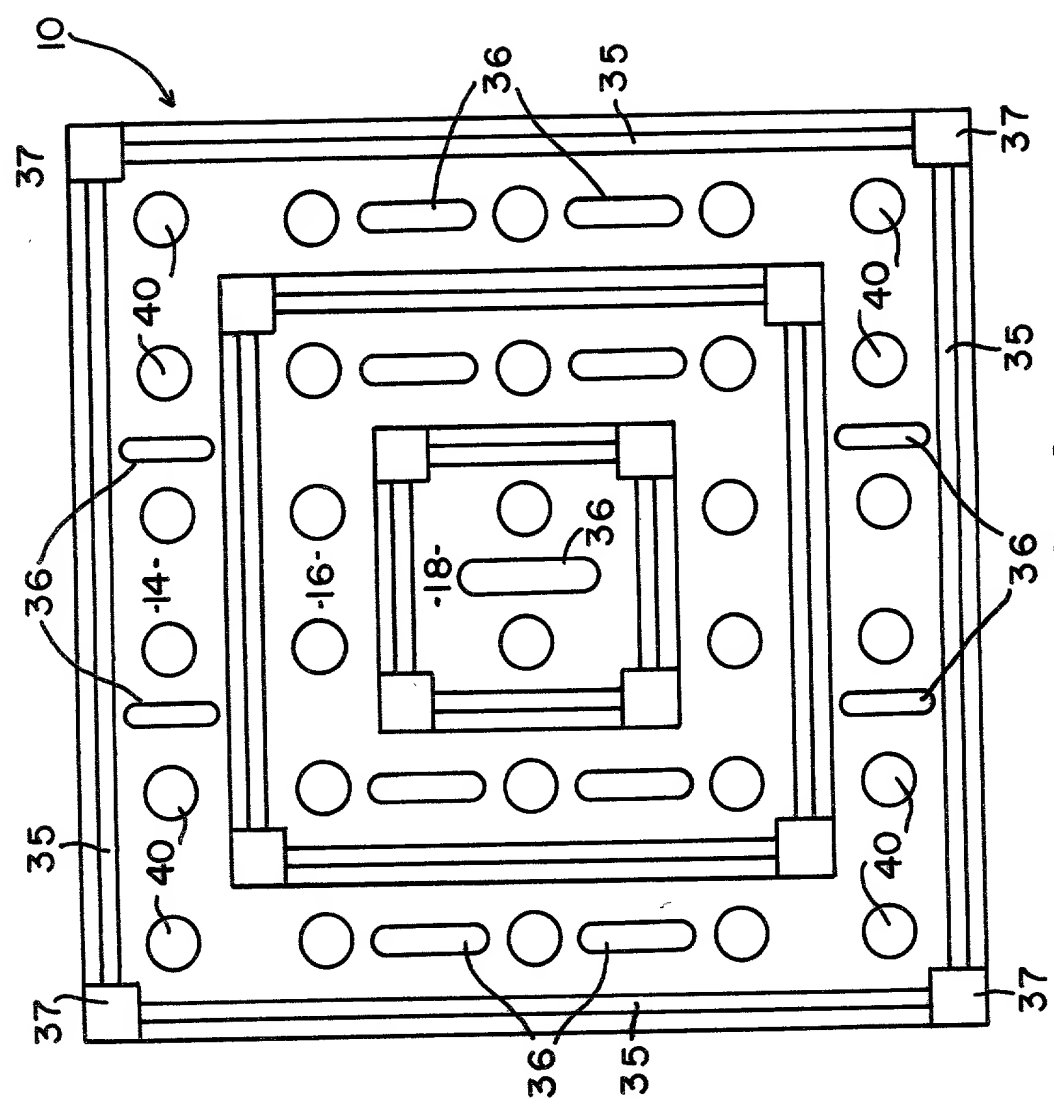


FIG. 4

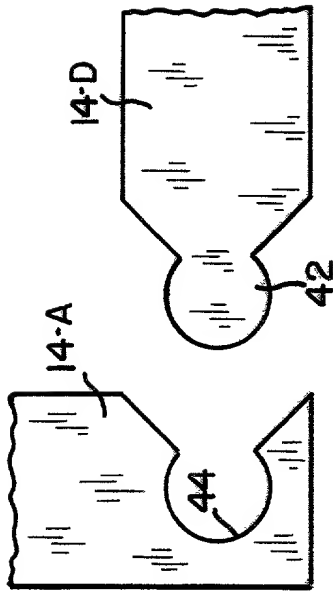


FIG. 5

FIG. 6

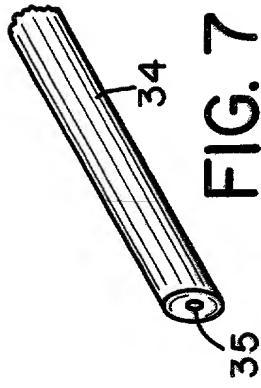


FIG. 7




FIG. 8




FIG. 9




FIG. 10

FIG. 11 is a schematic diagram of a device 10, showing a top view of a rectangular frame 14 with four corner tabs 28. The frame 14 is divided into four quadrants 14-A, 14-B, 14-C, and 14-D. Each quadrant contains a central rectangular region 16. The regions 16 are further divided into four sub-regions 18-A, 18-B, 18-C, and 18-D. The regions 18 are connected by a central cross-shaped region 18-G. The regions 18 are further divided into four sub-regions 18-A, 18-B, 18-C, and 18-D. The regions 18 are further divided into four sub-regions 18-A, 18-B, 18-C, and 18-D.

10

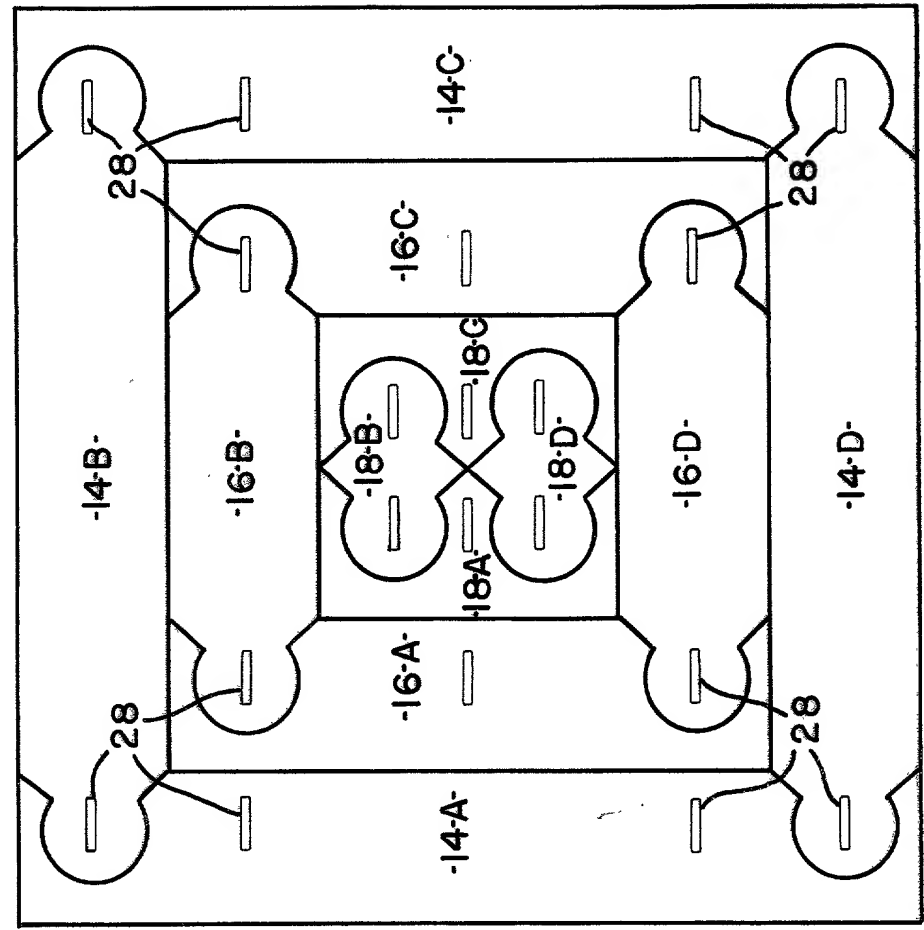


FIG. 11

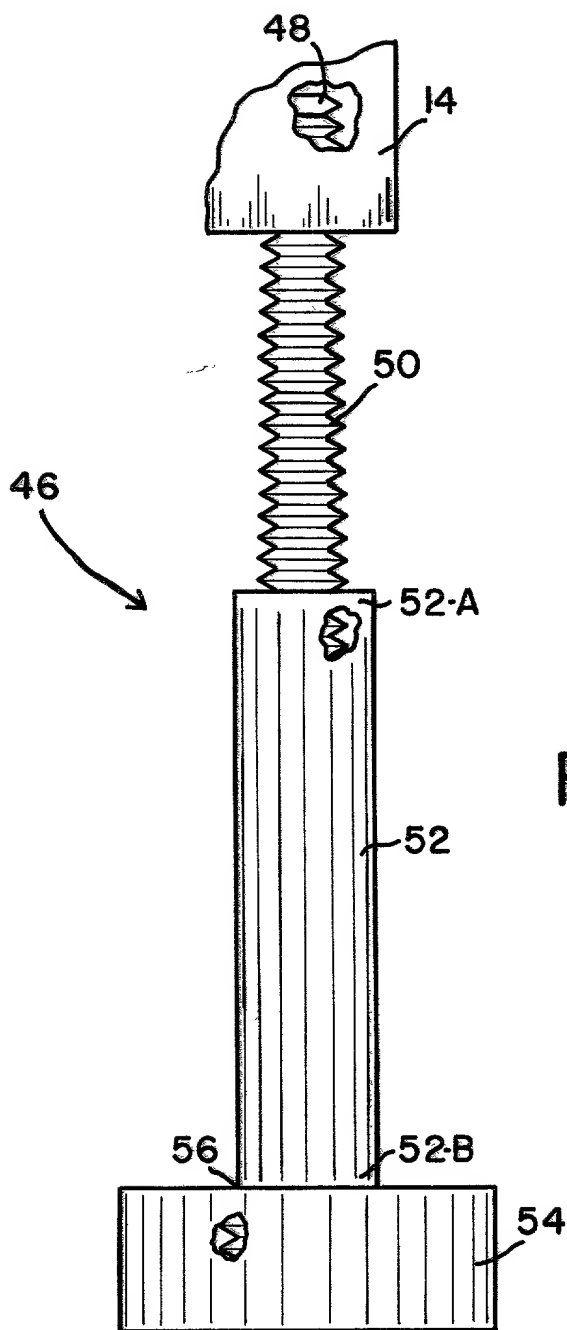


FIG. 12

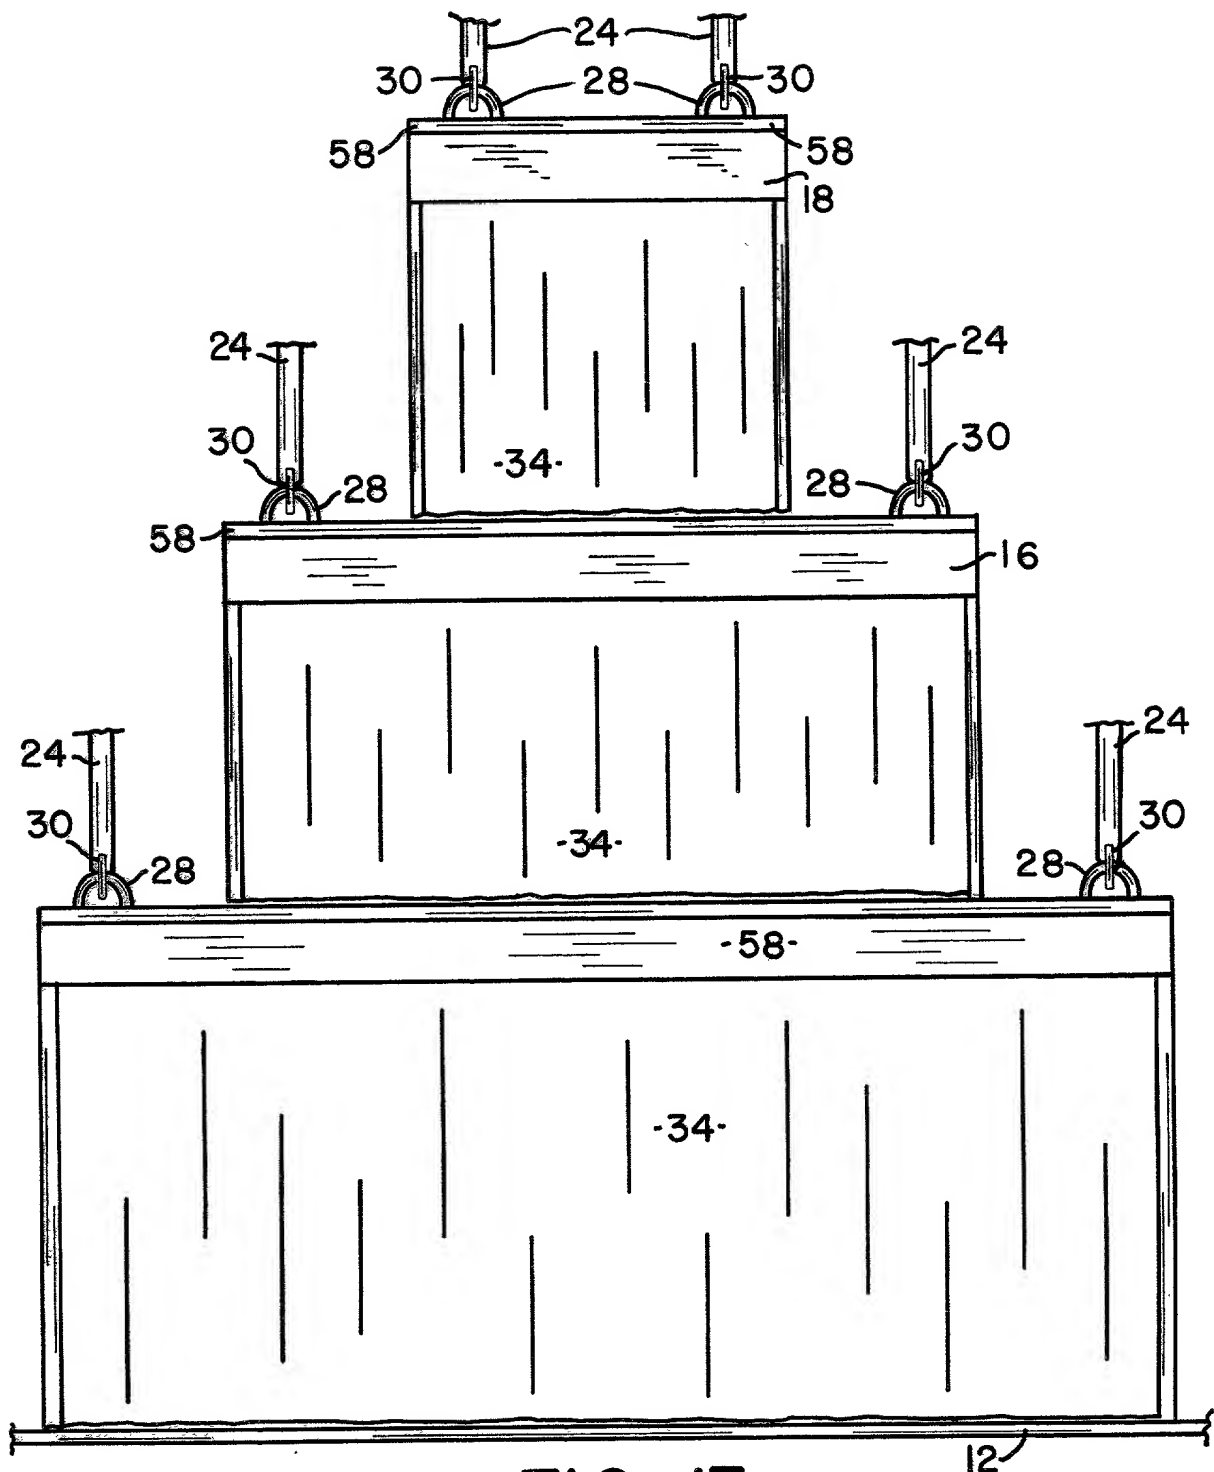


FIG. 13



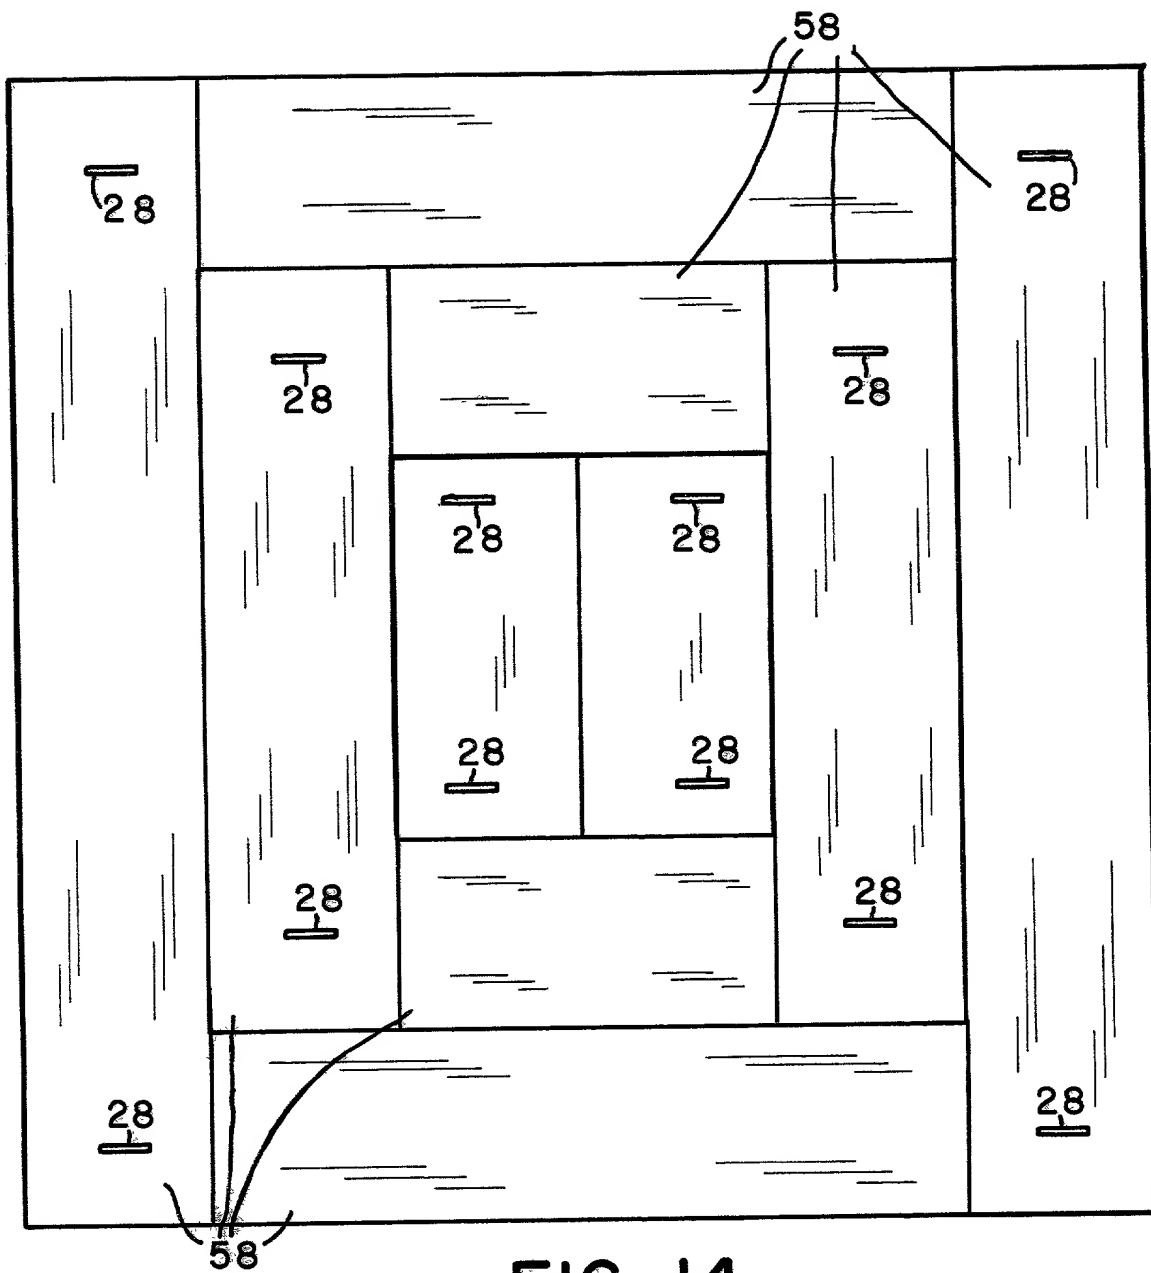


FIG. 14